

## **W-LAN-Konfiguration auf Scanner Datalogic Memor X3**


Anleitung zur Konfiguration

## Anleitung zur Konfiguration W-LAN

- Icon **My Device** (*Mein Gerät*) auswählen




- Icon **Control Panel** (*Systemsteuerung*) auswählen

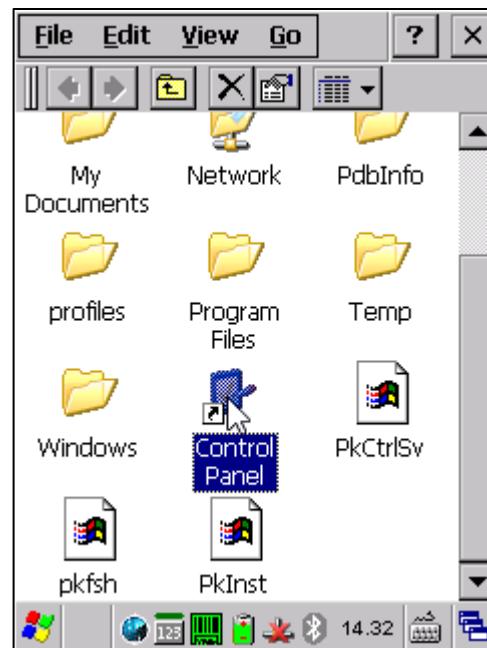


- Icon **Wi-Fi** auswählen




- Register **Profile** auswählen

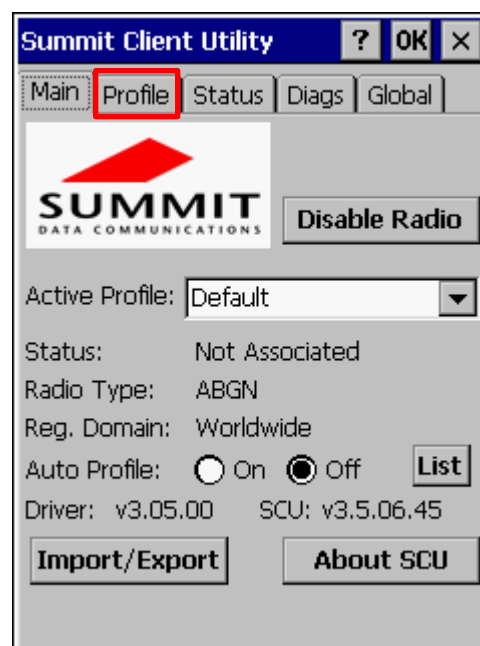


- Schaltfläche **Scan** auswählen, um nach Netzwerken zu suchen

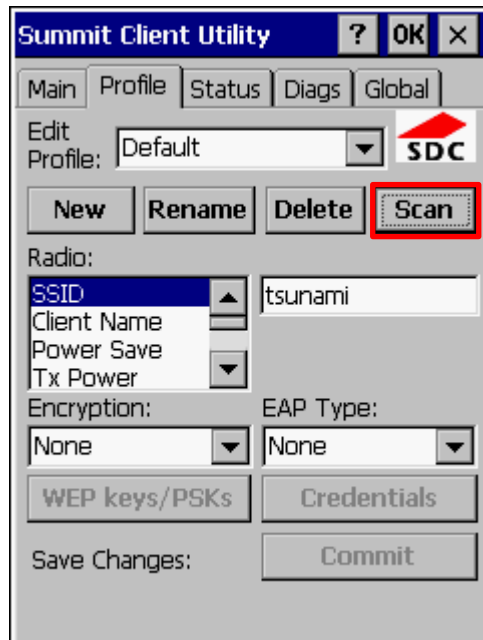


- Entsprechendes W-LAN auswählen und mittels Schaltfläche **Configure** bearbeiten

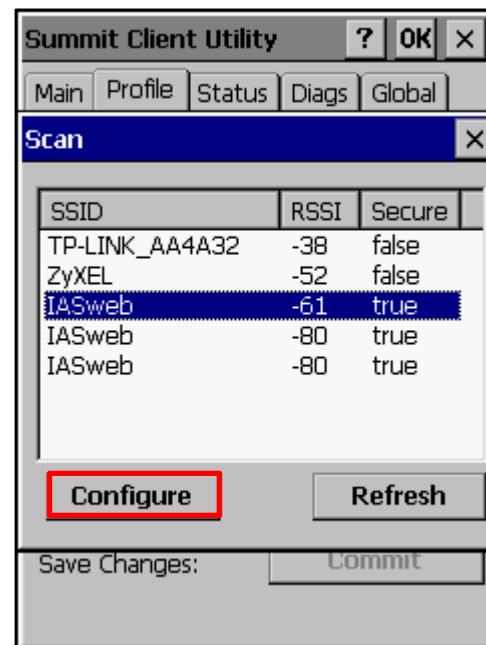

- Abfrage zur Profilerstellung mittels Schaltfläche **Yes** bestätigen

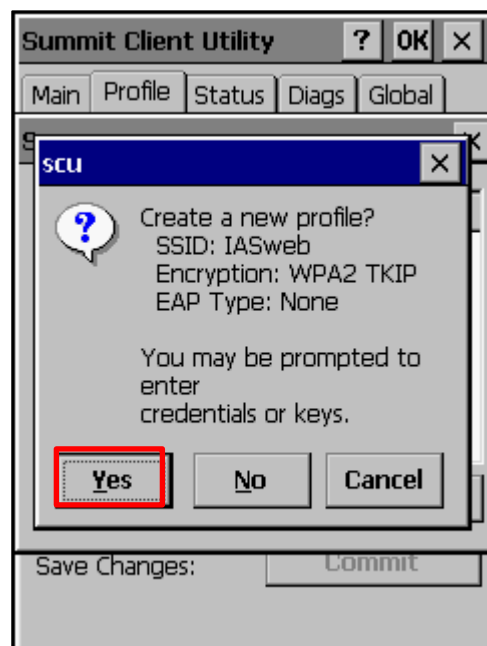

- W-LAN-Key (Passwort) eingeben und mittels Schaltfläche **OK** bestätigen

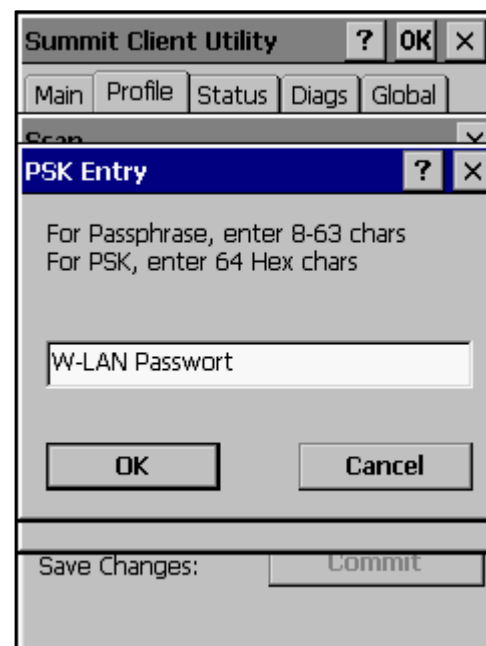

- Profil bearbeiten:  
im Bereich **Radio** → **Power Save**  
auswählen → **Fast** auswählen

Summit Client Utility [?] [OK] [X]

Main Profile Status Diags Global

Edit Profile: IASweb SDC

New Rename Delete Scan

Radio:

SSID Client Name Power Save Tx Power

Encryption: WPA2-PSK-TKIP EAP Type: None

WEP keys/PSKeys Credentials

Save Changes: Commit

- **Tx Power** auswählen → **Maximum** auswählen

Summit Client Utility [?] [OK] [X]

Main Profile Status Diags Global

Edit Profile: IASweb SDC

New Rename Delete Scan

Radio:

Power Save Tx Power Bit Rate Radio Mode

Encryption: WPA2-PSK-TKIP EAP Type: None

WEP keys/PSKeys Credentials

Save Changes: Commit

- Einstellungen mittels Schaltfläche **Commit** aktivieren

Summit Client Utility [?] [OK] [X]

Main Profile Status Diags Global

Edit Profile: IASweb SDC

New Rename Delete Scan

Radio:

Power Save Tx Power Bit Rate Radio Mode

Encryption: WPA2-PSK-TKIP EAP Type: None

WEP keys/PSKeys Credentials

Save Changes: Commit

- Register **Main** auswählen

Summit Client Utility [?] [OK] [X]

Main Profile Status Diags Global

SUMMIT DATA COMMUNICATIONS

Disable Radio

Active Profile: Default

Status: Not Associated

Radio Type: ABGN

Reg. Domain: Worldwide

Auto Profile: On Off List

Driver: v3.05.00 SCU: v3.5.06.45



Import/Export About SCU

- Das neu erstellte W-LAN-Profil im Auswahlménü **Active Profile** auswählen
- Sobald der Status auf **Associated** wechselt, ist das Endgerät im W-LAN eingebucht



## Konfiguration Statische IP-Adresse

- Im Control Panel das Icon **Network and Dial-up Connections** auswählen
- Per Doppelklick die Netzwerkeinstellung **SDCSD40N1** bearbeiten

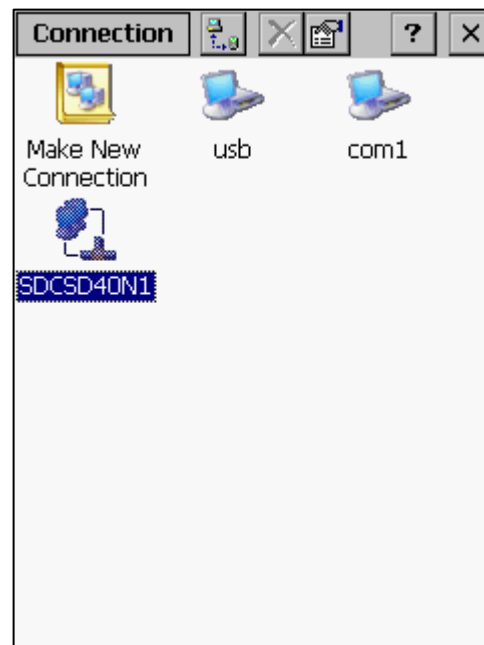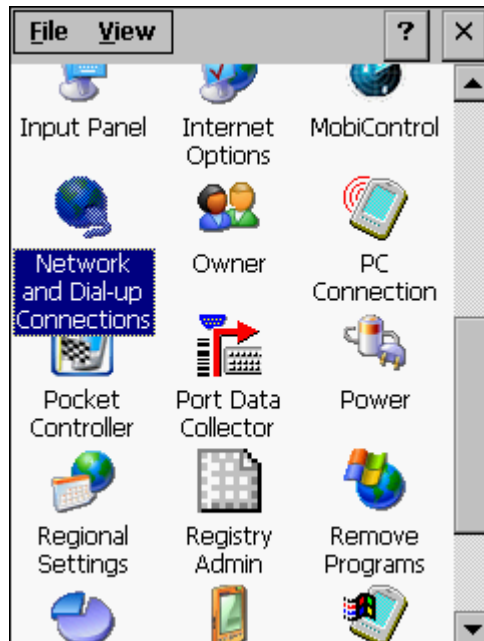

- Auswahl **Specify an IP address** aktivieren und entsprechende IP-Daten eingeben
- Registertaste **Name Servers** auswählen und erforderliche DNS-Serverdaten eingeben. Bearbeitung mittels **OK** beenden.

